






**2013 CA RESIDENTIAL
CODE
R905**

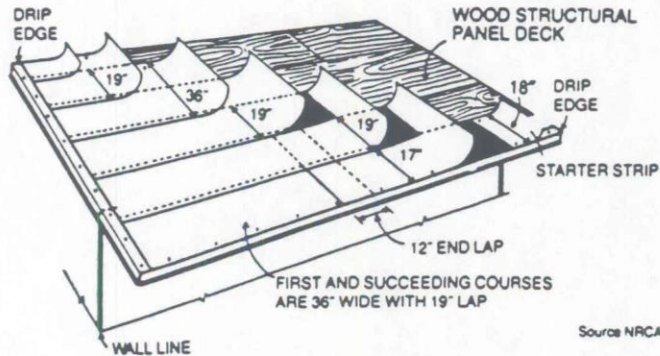


LOW SLOPE (LESS THAN 4:12) UNDERLAYMENT APPLICATION

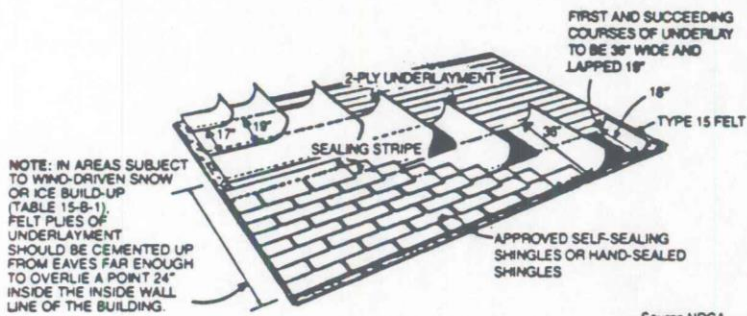

APPLICATION OF ASPHALT SHINGLE SLOPES BETWEEN 2:12 AND 4:12

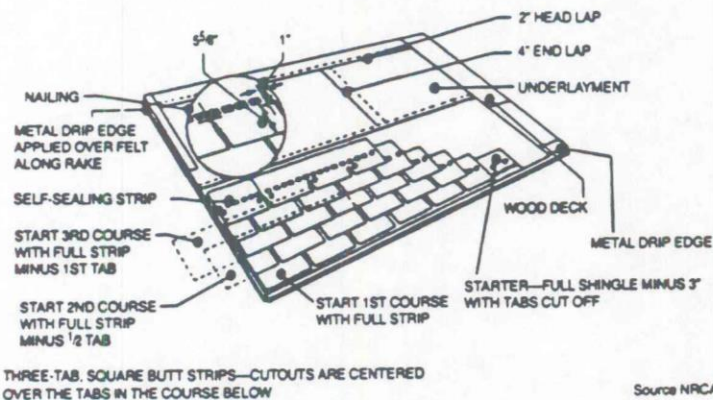


ASPHALT ROOFING SHINGLES APPLICATION HIGH SLOPE (4:12 MINIMUM)

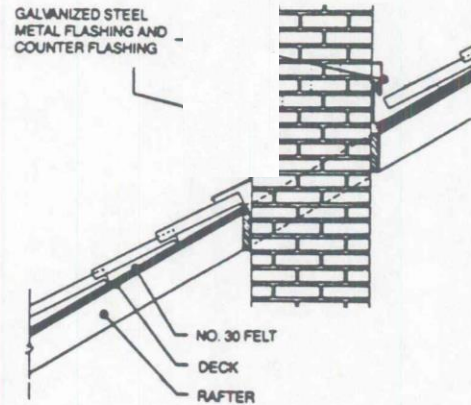

CHIMNEY FLASHING DETAIL

Source NRCA
NAILING AS RECOMMENDED BY MANUFACTURER
MIN 36" WIDE TYPE 15 FELT OR HEAVIER

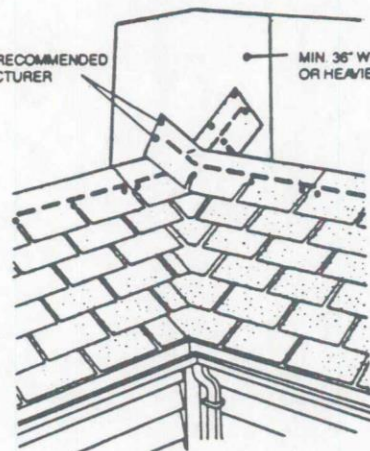

**DIAGRAM B
ALTERNATE VALLEY FLASHING
(Asphalt Shingles)**